
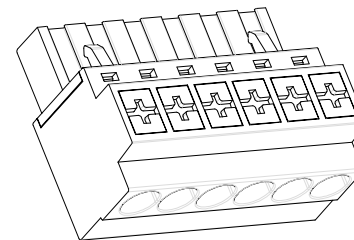

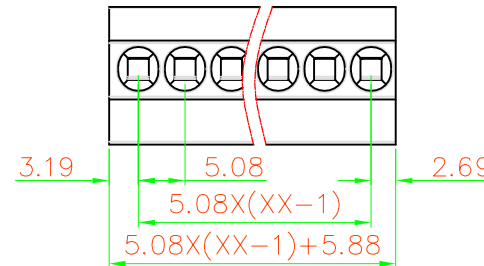
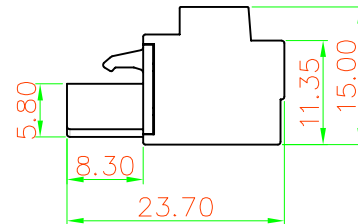




未注公差/General tolerances(mm)											0.1/10		
0 ~ 3	>3 ~ 6	>6 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400		>400 ~ 500	>500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.45	±0.53	±0.63	±0.75	±0.90	±1.05	±1.20	±1.50

REV	ECN	DESCRIPTION	DRFT	DATE



UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/15	/	300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	250/18	320/18	630/18
额定脉冲电压(kV)/Rate Impulse Voltage(KV)	4	4	4
螺丝扭矩/Torque Tightening(N·m/Lb.in)	/		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)	0.2~2.5/28~12		
间距/Pitch(mm)/线数范围/Poles	5.08/N=02~24P		
剥线长度/Stripping length(mm)	10~11		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

Button	PA66	UL94V-0
Spring	Stainless steel	SUS301
Conductor	Copper alloy	Sn Plated
Insulator	PA66	UL94V-0
NAME OF PART	MATERIAL	NOTES

MAT NO.:	/ /	ORABO 宁波地博电气有限公司	
STATUS:	/ /	NINGBO DORABO ELECTRICAL CO., LTD	
APPD: MARK	2024.03.20	NAME: DB2EKS-5.08	
CHKD: MARK	2024.03.20		
DRFT: MARK	2024.03.20	DRAWING NO.:	XX
REV	MO	SCALE:	
SIZE: A4	mm (inch)	TYPE: CUSTOMER_DRAWING	SHEET 1/1